



Guided Wave Radar Level Transmitter



PRODUCT INTRODUCTION

OPERATING PRINCIPLE

The guided wave radar level transmitter is a solid and liquid level measuring instrument commonly used in the industry. It transmits electromagnetic pulses along with the steel wire cable or tube/rod to propagate at the speed of light; when these encounter the surface of medium to be measured, the pulses will be partly reflected to form an echo wave and returned to the pulse transmission device along the same path, and the height of liquid level can be calculated.

The guided wave radar level transmitter uses advanced echo wave processing technology with a wide range of product applications that is capable of measuring the low dielectric constant of solids level, liquid level and interface levels. The unit has a coated stainless steel wire cable type for the customer's application, suitable for high temperature and high pressure medium liquid level measurement.

FEATURES

- Meets the various measurement requirements of different temperature, pressure and medium.
- Contact measuring, capable of overcoming the steam, foam and stirring effects.
- 4~20 mA / 2 lead wires, simple wiring, low power consumption (2.4W max.).
- 128*64 LCM Display, easy on-site adjustment.
- Display distance, level, percentage, current 4~20 mA.
- Unique algorithms and echo wave processing technology can be used under various types of complex work conditions.
- Echo wave graphics display function, to display the signal waveform inside the tank, can be used for background noise processing.
- Operation Interface Language Selection: Traditional Chinese, Simplified Chinese, English.
- Capable of simulating output current signal of 4mA, 20mA.
- Save back ground noise function, eliminates false echoes.
- Support internal automatic temperature compensation.


TEST STANDARDS

- High voltage :IEC60947-2
- Insulation resistance :IEC60092-504
- Power supply variation :IEC60092-504
- Power supply failure :IEC60092-504
- Electrical burst testing :IEC61000-4-4
- Voltage DIPS :IEC61000-4-11
- Humidity :IEC60068-2-30
- High/Low temperature test :IEC60068-2-38
- IP protection rating :IEC60529

APPLICATION AREAS




- Power plant
- Chemical plant
- Cement plant
- Water treatment
- Oil and Gas
- Steel plant
- Refinery plant

SPECIFICATION

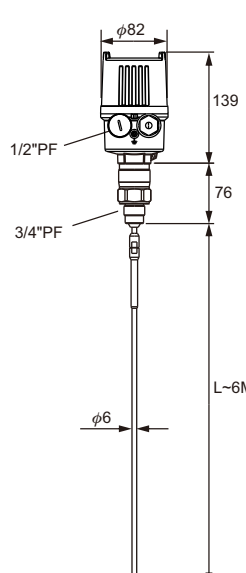Dimensions (Unit: mm)			
Model	JTR301	JTR301	JTR305
Medium of the material	Liquid		Low Dielectric Liquid
Min. Dielectric coefficient (constant)	2.0		1.6
Measuring range	6m	20m	6m
Accuracy	± 5mm		
Repeatability	± 3mm		
Ambient temperature	-40~80°C		
Operating temperature	-40~150°C		
Operating pressure	0~60Bar(25°C)		
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire		
Analog output	4~20mA		
Current distinguishability	1.6uA		
Load impedance	(Vs-16)/0.022 Ohm for 2-Wire, 300 Ohm for 4-Wire>16V		
Digital communication	HART 7.0 for 2-Wire, Modbus RTU for 4-Wire		
Housing material	Aluminum alloy		
Protection rating	IP67		
Antenna type	Tube/Rod type	Steel wire cable type	Coaxial type
Minimum connection	3/4"PF		
blind area	High dielectric coefficient ($\epsilon > 10$) : Upper blind area < 100mm · Lower blind area < 50mm Low dielectric coefficient ($\epsilon < 10$) : Upper blind area < 500mm · Lower blind area < 100mm		
Intrinsically safe parameters (option)	Power (V+,V-) : $U_i=30V$, $I_i=100mA$, $P_i=0.7W$, $C_i=0\mu F$, $L_i=0mH$ Analog out : $U_o=13.65V$, $I_o=69mA$, $P_o=0.236W$, $C_o=0.79\mu F$, $L_o=7468\mu H$ Digital (D+,D-) : $U_i=12V$, $I_i=100mA$, $P_i=0.3W$, $C_i=0\mu F$, $L_i=0mH$; $U_o=5.88V$, $I_o=12.5mA$, $P_o=18.5mW$, $C_o=43\mu F$, $L_o=3555\mu H$		

※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

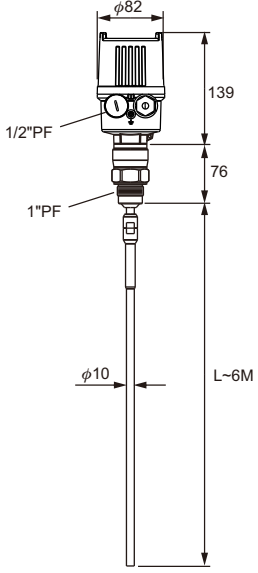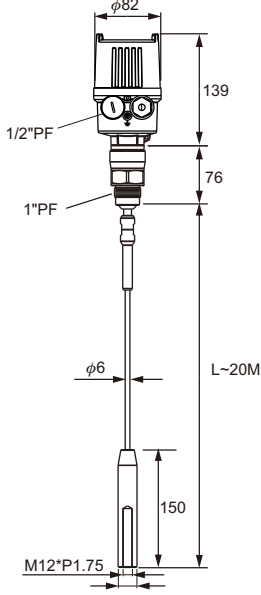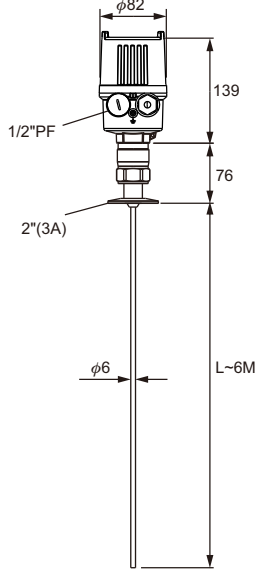Dimensions (Unit: mm)			
			
			
Model	JTR302		JTR30A
Medium of the material	Solid		Liquid/Solid
Min. Dielectric coefficient (constant)	2.0		
Measuring range	6m	20m	6m
Accuracy	± 5mm		
Repeatability	± 3mm		
Ambient temperature	-40~80°C		
Operating temperature	-40~150°C		
Operating pressure	0~60Bar(25°C)		
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire		
Analog output	4~20mA		
Current distinguishability	1.6uA		
Load impedance	(Vs-16)/0.022 Ohm for 2-Wire, 300 Ohm for 4-Wire>16V		
Digital communication	HART 7.0 for 2-Wire, Modbus for 4-Wire		
Housing material	Aluminum alloy		
Protection rating	IP67		
Antenna type	Tube/Rod type	Steel wire cable type	Tube/Rod type
Minimum connection	1"PF		1"(3A)
blind area	High dielectric coefficient ($\epsilon > 10$) : Upper blind area < 100mm · Lower blind area < 50mm Low dielectric coefficient ($\epsilon < 10$) : Upper blind area < 500mm · Lower blind area < 100mm		
Intrinsically safe parameters (option)	Power (V+,V-) : $U_i=30V$, $I_i=100mA$, $P_i=0.7W$, $C_i=0\mu F$, $L_i=0mH$ Analog out : $U_o=13.65V$, $I_o=69mA$, $P_o=0.236W$, $C_o=0.79\mu F$, $L_o=7468\mu H$ Digital (D+,D-) : $U_i=12V$, $I_i=100mA$, $P_i=0.3W$, $C_i=0\mu F$, $L_i=0mH$; $U_o=5.88V$, $I_o=12.5mA$, $P_o=18.5mW$, $C_o=43\mu F$, $L_o=3555\mu H$		

※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION (HIGH TEMPERATURE TYPE)



NEPSI Ex ia IIC T2~T4 Ga
IECEx Ex ia IIC T2~T6 Ga
ATEX 2277 Ex II 1G Ex ia IIC T2~T6 Ga
CSA Class I, Zone 0, AEx ia IIC T2~6 Ga;
Class I, Division 1, Groups A, B, C & D, T2~6


Dimensions (Unit: mm)			
Model	JTR301	JTR302	JTR305
Medium of the material	Liquid	Solid	Low Dielectric Liquid
Min. Dielectric coefficient (constant)	2.0		1.6
Measuring range	6m		
Accuracy	± 5mm		
Repeatability	± 3mm		
Ambient temperature	-40~80°C		
Operating temperature	-40~230°C		
Operating pressure	0~60Bar(25°C)		
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire		
Analog output	4~20mA		
Current distinguishability	1.6uA		
Load impedance	(Vs-16)/0.022 Ohm for 2-Wire, 300 Ohm for 4-Wire>16V		
Digital communication	HART 7.0 for 2-Wire, Modbus for 4-Wire		
Housing material	Aluminum alloy		
Protection rating	IP67		
Antenna type	Tube/Rod type		Coaxial type
Minimum connection	3/4"PF	1"PF	3/4"PF
blind area	High dielectric coefficient ($\epsilon > 10$) : Upper blind area < 100mm · Lower blind area < 50mm Low dielectric coefficient ($\epsilon < 10$) : Upper blind area < 500mm · Lower blind area < 100mm		
Intrinsically safe parameters (option)	Power (V+,V-) : $U_i=30V$, $I_i=100mA$, $P_i=0.7W$, $C_i=0uF$, $L_i=0mH$ Analog out : $U_o=13.65V$, $I_o=69mA$, $P_o=0.236W$, $C_o=0.79uF$, $L_o=7468uH$ Digital (D+,D-) : $U_i=12V$, $I_i=100mA$, $P_i=0.3W$, $C_i=0uF$, $L_i=0mH$; $U_o=5.88V$, $I_o=12.5mA$, $P_o=18.5mW$, $C_o=43uF$, $L_o=3555uH$		

※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

FUNCTIONAL PRINCIPLE


LIQUID LEVEL MEASUREMENT

High frequency microwave pulses travel along the steel wire cable or tube/rod. When they reach the medium surface, the microwave pulses are reflected. The pulse operating time is calculated and outputted by the electronic instrument of this meter as the liquid level height.

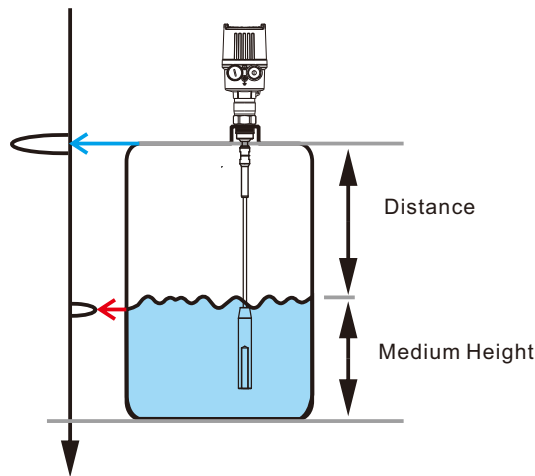

MEASURING RANGE

The bench-mark of the measuring range is the thread or flange contact surface of the sensor. It should be noted that the measuring range is below the reference plane to the bottom of the induction rod and the upper and lower blind areas that cannot be measured. The default value, measuring range of this meter is set up with "water" as the test medium.

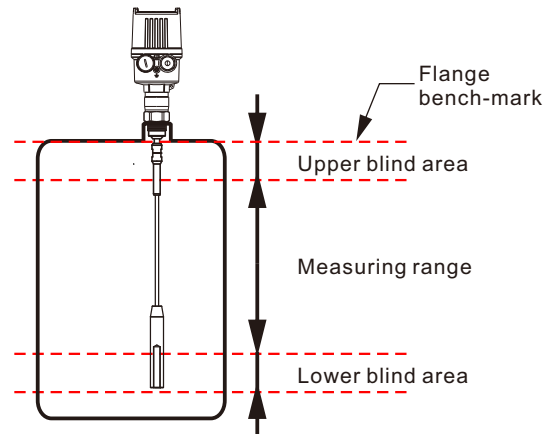

BOTTOM SENSING DETECTION TRACKING TECHNOLOGY

This Meter is equipped with bottom sensing detection tracking mode, when the measured medium has a low dielectric constant, in order to increase the sensitivity. This feature is useful such as in the plastic particles, packing chips or in liquefied containers. When the dielectric constant is between 3 and 10, as long as the echo wave signal cannot be detected, the bottom sensing detection tracking function will be automatically activated.


The calculation of the measured value uses the dielectric constant last recorded; the accuracy of the meter depends on the stability of the dielectric constant.

If the medium's dielectric constant is less than 3, the bottom sensing detection tracking function is automatically activated throughout the process. The medium's dielectric constant must be input as a stable dielectric constant is important in the measurement.

FUNCTIONAL PRINCIPLE

INTERFACE LIQUID LEVEL INTERFACE MEASUREMENT

High frequency microwave pulses travel along the steel wire cable or tube/rod. When they reach the medium surface, part of the microwave pulses are reflected. The other part penetrates through the upper layer of medium and generates the second reflection at the interface between upper and lower layers of the medium. Two pulse operating time periods are calculated and outputted by the electronic instrument of this meter as the dual liquid level heights.

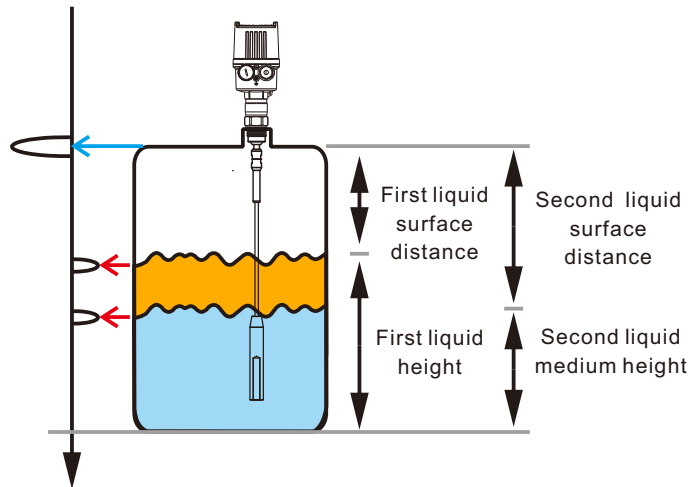

Dual Liquid Level Interface Measuring Condition:

Upper layer medium (L2):

The upper layer medium must be nonconductive dielectric; the dielectric constant of upper layer medium or the actual distance to interface must be known; the dielectric constant of the upper layer medium needs to be greater than 1.6.

The upper layer medium must be stable and the medium cannot be changed or mixed; the upper layer medium must be uniform, and the minimum thickness of the upper layer medium without layering shall be greater than 50 mm (1.97 inches) and clearly separated between the upper layer and lower layer mediums. If there is emulsion phase or debris layer, the maximum thickness shall not be greater than 50 mm (1.97 inches), better measuring results can be achieved without foam on the surface if possible.

Lower layer medium (L1):

The dielectric constant of lower layer must be 10 greater than the dielectric constant of lower layer, preferably conductive medium.

For example, if the dielectric constant of upper layer is 2, the dielectric constant of lower layer shall be at least 12.

Gas layer (L3):

This layer is the mixture of air or gas

Dual Liquid Level Interface Measurement output signal setting:

The meter shall be set up for using in "Separate layers interface measurement", used in interface measurement of two types of liquid, dual analog output version can be selected and adjusted in the setting menu.

INSTALLATION INFORMATION

Please note that when installing the JTR3 series product in a metal container, the spacing from the other devices in the container shall be at least 300 mm (12 in).

When installing in a non-metal container, the spacing from the container wall shall be at least 500 mm (19.7 in).


It is necessary to ensure the induction rod must not touch any device or tank wall during operation.

It is recommended to fix the bottom of the rod in the tank to reduce the induction rod shaking when using steel wire cable type induction rod.

Please note that this meter has upper and lower blind areas that it is impossible to measure the bottom end of the induction rod.


When the welding operation is required during the installation process, please remove the electronic module of the sensor from the terminal box before starting the welding work to avoid damage to the electronic equipment due to induction coupling or other failures.

When used in plastic/glass containers, it is necessary to use the meter type with flange or place a piece of metal plate ($\phi > 200\text{mm}$ / 8in) under the processing connection when locked. The metal plate shall be directly contacted with the processing connection.

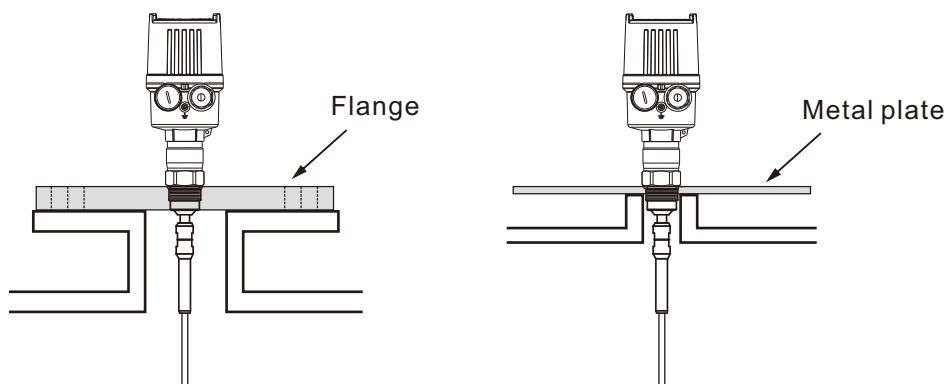

During installation, please avoid using the extension tube on the container. Please install the sensor leveled with the top cover of the container as possible. If this cannot be done, please use a shorter extension tube.

Please do not install this instrument at the inlet to ensure that the meter is in a stable position in the medium and not in the inflow position of the liquid to avoid false measurements when the liquid flows in.

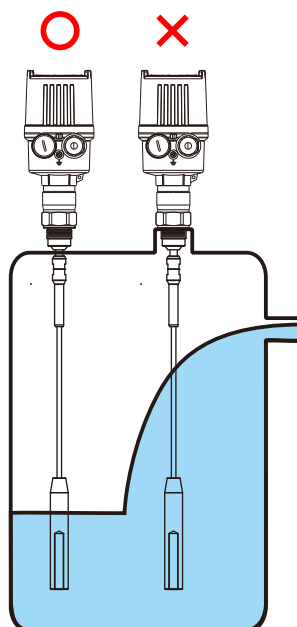

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
JTR301	JTR1□□□□-A1 JTR1□□□□-A2
JTR302	JTR1□□□□-B1 JTR1□□□□-B2
JTR305	JTR1□□□□-A3
JTR30A	JTR103□□-E1



ORDERING INFORMATION

MXGWR ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓

⑤ ⑥ Model

- 00: Standard
- 02: Hi-temperature
- 03: Sanitary

⑦ ⑧ Certification

- 00: None
- 1B: ATEX-Ex ia
- 2B: IECEX-Ex ia
- 6B: CSA
- 7B: NEPSI-Ex ia

⑨ ⑩ Probe Type

- A1: Rod type for liquid 6mm
- A2: Steel wire cable type for liquid 4mm
- A3: Coaxial type 21.7mm
- B1: rod type for solid
- B2: cable type for solid
- C1: Coated Cable type

⑪ ⑫ Probe material

- MA: SUS 304
- MB: SUS 316
- MC: SUS 316L

Connection

⑬ ⑭

- Flange
- AJ: JIS-RF
- AN: ANSI-RF
- AR: DIN-RF
- AI : 3A

Thread

- AA: JIS
- AC: ANSI

⑮ ⑯

- A7: 3/4"
- A8: 1"
- B1: 1-1/2"
- B2: 2"
- B5: 3"
- B7: 4"
- E1: DN40

⑰ ⑱

- 00: None
- 01: PT male
- 03: PF male
- 07: NPT male
- 13: GAS male
- 40: 5 kg/cm²
- 48: 150 Lbs
- 56: PN 6
- 57: PN10
- 59: PN25



B: Loop Power 16 ~ 30 Vdc with HART
D: Loop Power 16 ~ 30 Vdc X 2 with HART
E: 4-Wire 16 ~ 30Vdc 4~20mA with RS485
H: 4-Wire 16 ~ 30Vdc, 4~20mA X2 with RS485

Code	Probe Length
0500~6000	500~6000mm
0500~A200	500~20000mm

SUCCESS STORY



Water purification barrel




Copper sulfate storage tank



High temperature boiler



Global Network

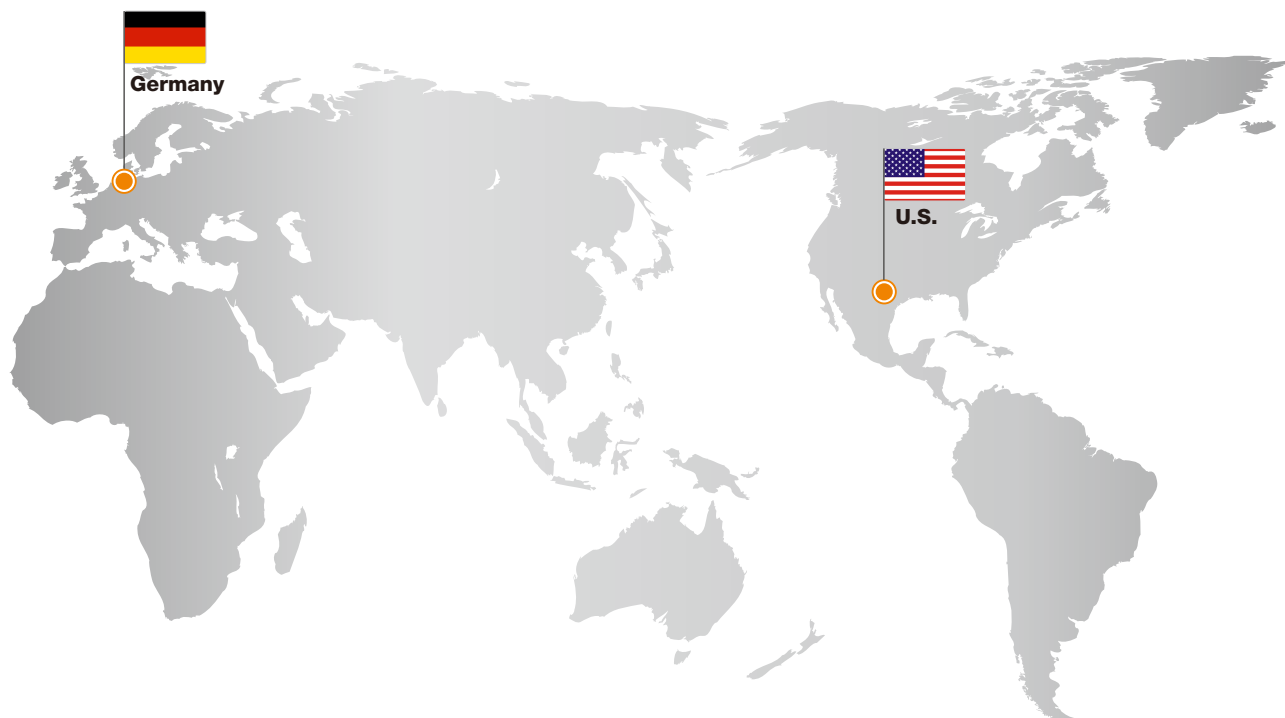

North America

TEXAS, USA
MICROWAVE PRECISION INSTRUMENTS, INC.
16203 Park Row Suite 125
Houston, TX 77084
TEL: 1 844-674-7466
EMAIL: info@microwave-precision.com

Europe

● Germany

Mütec Instruments GmbH - Germany Office

Bei den Kämpfen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-0
FAX: +49-(0)4185-8083-80
EMAIL: muetec@muetec.de

